


▶ THE FUTURE IS NOW



# GO-SCAN 4335

Portable Digital Radiography Detector

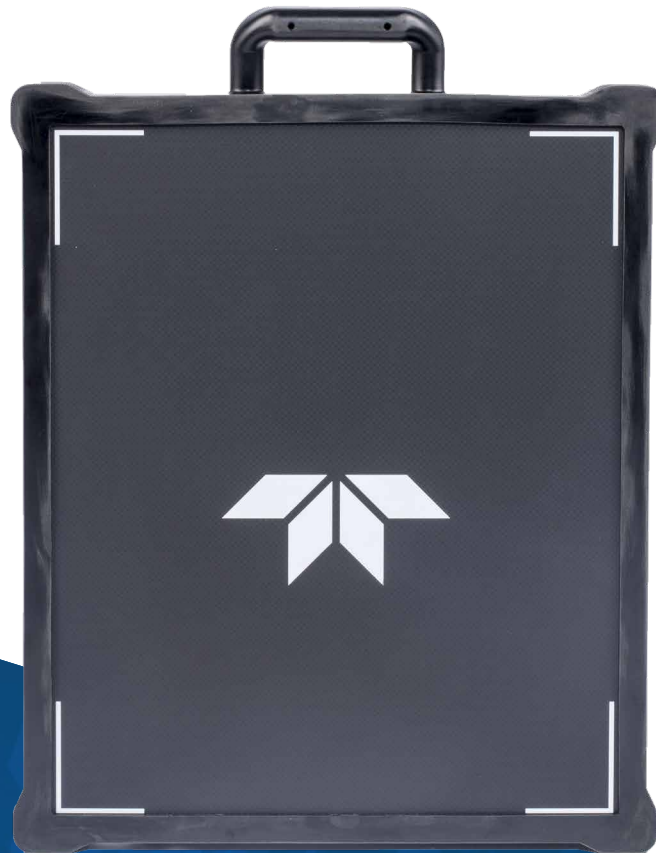

## Enter into the new world of digital inspection



BATTERY OPERATED



IP 67



WIRELESS OR CABLE




ASI TECHNOLOGY




PLUG & PLAY



RUGGEDIZED



STATE-OF-THE-ART IMAGE EDITING SOFTWARE



FULLY INTEGRATED

### FEATURES

	Unit	GO-SCAN 4335
<b>GENERAL</b>		
Technology	-	aSi
Pixel pitch	µm	154
Active area	mm/in	433.7 x 354.8 / 16.9 x 13.8
Active resolution	pxl	2816 x 2304
<b>BANDWIDTH</b>		
Data interface	-	GigE & Wi-Fi
ADC conversion	bits	16
<b>POWER CONSUMPTION</b>		
Power consumption	W (standing/operating)	< 8 / 20
<b>INTEGRATION</b>		
Overall dimension	mm/in	464 x 388 x 188 / 18.26 x 15.27 x 7.4
Overall weight (without sleeve)	Kg/lbs	5.9 / 13
<b>ENVIRONMENTAL</b>		
Waterproof level	-	IP67
Drop test	m/in	1.39
Operating temperature	°C/F°	-20, 50°C / -4, +122°F
Storage temperature	°C/F°	-20, 50°C / -4, +140°F
Humidity	% R.H.	30 to 75
Life span	Gy/k rem	1000 / 100

### SHERLOCK NDT SOFTWARE


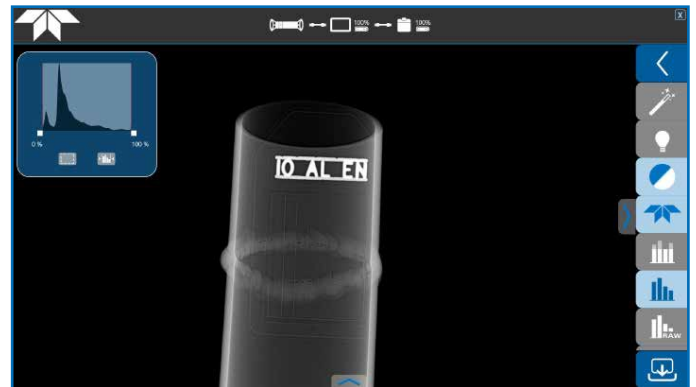


Image editing	Smart measurement tool
ADRC dynamic filter	SNR
Local contrast enhancement	Greyscale feature
Teledyne filter	iSRb
Histogram equalization	Annotation / Highlight
Emboss	Mirroring / Rotation
Black & white	Auto IQI
Pseudo-colours	Pixel map edition

### DRAWINGS



### ACCESSORIES

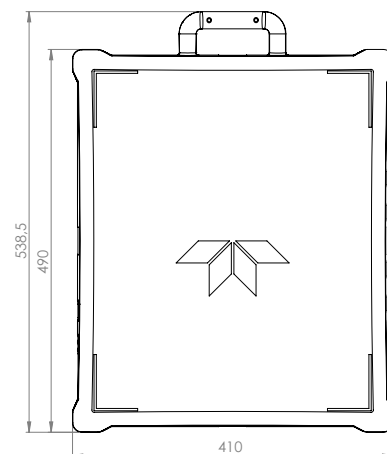

FIXTURING BAR



LATERAL FEET



POWER/COM CABLE

All specifications are non contractual and subject to change without prior notice.

#### TELEDYNE ICM

Zoning Les Plenesses / Rue Du Progrès 3 / B-4821 Andrimont (Dison) - Belgium  
+32 (0)87 44 01 50 / icm.sales@teledyne.com



**TELEDYNE ICM**  
Everywhereyoulook™

Part of the Teledyne Imaging Group